


Plan of Doorways

d Denotes galvanised AlphaJoint 4010 at roller shutter doorway (1D)
g Denotes galvanised AlphaJoint 4010 at sliding doorway (1G)

Note :- Galvanised Permaban


AlphaJoint 4010 to be double strip if external concrete or single strip if external is paviments or asphalt

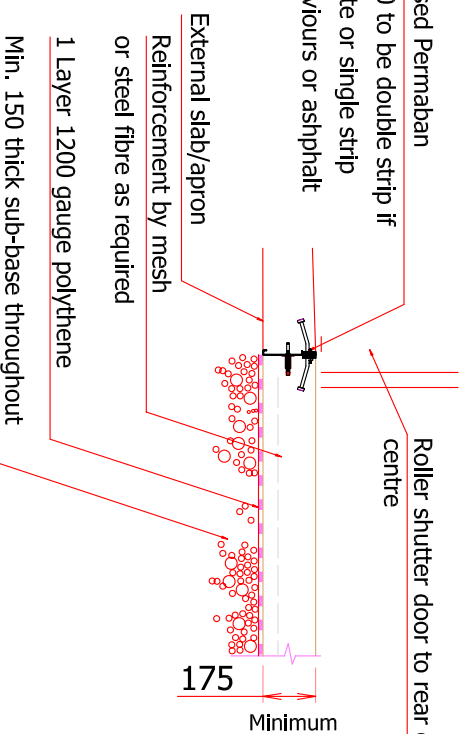

Roller shutter door to rear of store or garden centre

Note :- Galvanised Permaban AlphaJoint

4010 to be lined up with outside face of wall and to be double strip if external concrete or single strip if paviments or asphalt

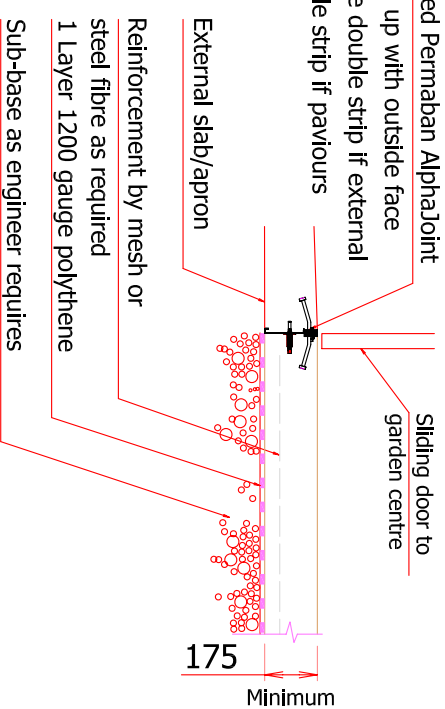

Sliding door to garden centre

Galvanised AlphaJoint 4010 'g' at roller shutter door

SECTION 1G

Galvanised AlphaJoint 4010 'd' at sliding doorway

SECTION 1D

DRAWING TITLE		DRAWING TYPE		GENERAL TOLERANCES		REVISION	
PERMABAN FLOOR SOLUTIONS		STANDARD B&Q DOOR DETAILS		UNLESS OTHERWISE STATED LINEAR ±		FIRST ISSUE	
DRAWING NO.	DRAWN BY	DATE	DIMENSION	SCALE	ANGULAR ± 0.5°	DESCRIPTION OF CHANGE	
SLIDING OR ROLLING SHUTTER DOOR	N. CASTLE	12/01/09	DIMENSION IN MILLIMETRES	NOT TO SCALE	1		
PROJECT REF	CHECKED BY	DATE		REF MEANS CHECK TO NOT MAKE TO	1.0		
B&Q				REMOVE ALL BURRS AND SHARP EDGES	0.1		
STOCK CODE	APPROVED BY	DATE		THIRD ANGLE PROJECTION	1.00		
					0.005		
© copyright reserved. All the information contained in this drawing remains the property of Permaban Ltd and is not to be used for any other purpose or disclosed to third parties without the express prior written consent of Permaban Ltd.						1.0	

Mill Close, Lee Mill Ind Estate
 Ivybridge, DEVON PL21 9GL
 t: +44(0)1752 895288
 f: +44(0)1752 690535
 e: info@permaban.com